


/ Perfect Welding / Solar Energy / Perfect Charging



SHIFTING THE LIMITS

# FRONIUS PRIMO

/ Optimised energy management.

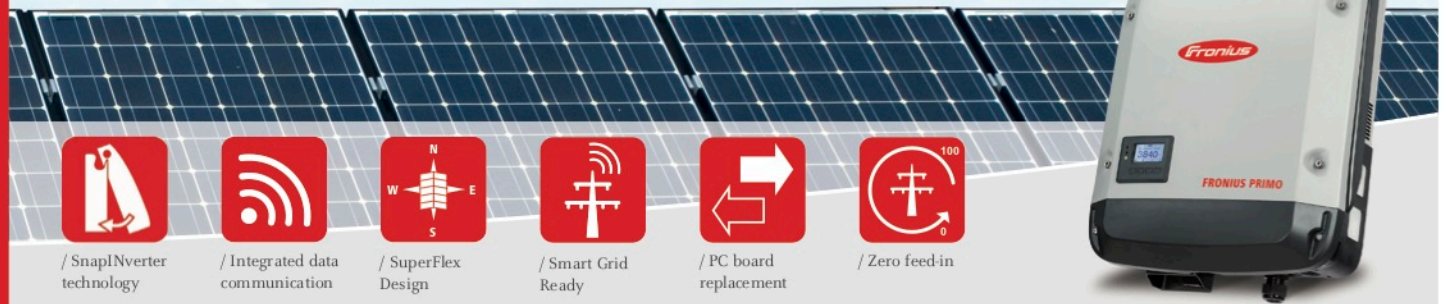

/ SnapINverter technology



/ Integrated data communication



/ SuperFlex Design



/ Smart Grid Ready



/ PC board replacement



/ Zero feed-in



/ The Fronius Primo in power categories from 3.0 to 8.2 kW perfectly completes the SnapINverter generation. This single-phase, transformerless device is the ideal inverter for residential systems. Its innovative SuperFlex Design provides maximum flexibility in system design, while the SnapINverter mounting system makes installation and maintenance easier than ever before. The communication package included as standard, with WLAN, energy management, several interfaces and much more, allows the Fronius Primo to communicate with the user, the PV system and the grid.

## TECHNICAL DATA FRONIUS PRIMO (3.0-1, 3.5-1, 3.6-1, 4.0-1, 4.6-1)

INPUT DATA	PRIMO 3.0-1	PRIMO 3.5-1	PRIMO 3.6-1 <sup>1)</sup>	PRIMO 4.0-1	PRIMO 4.6-1 <sup>1)</sup>
Max. input current ( $I_{dc\ max\ 1} / I_{dc\ max\ 2}$ )			12.0 A / 12.0 A		
Max. array short circuit current ( $MPP_1 / MPP_2$ )			18.0 A / 18.0 A		
Min. input voltage ( $U_{dc\ min}$ )			80 V		
Feed-in start voltage ( $U_{dc\ start}$ )			80 V		
Nominal input voltage ( $U_{dc\ r}$ )			710 V		
Max. input voltage ( $U_{dc\ max}$ )			1,000 V		
Usable MPP voltage range ( $U_{mpp\ min} - U_{mpp\ max}$ )			80 V - 800 V		
MPP voltage range at nominal power ( $U_{mpp\ min} - U_{mpp\ max}$ )		200 - 800 V		210 - 800 V	240 - 800 V
Number of MPP trackers			2		
Number of DC connections			2 + 2		
Max total PV array size ( $P_{dc\ max}$ )	4.5 kW <sub>peak</sub>	5.3 kW <sub>peak</sub>	5.5 kW <sub>peak</sub>	6.0 kW <sub>peak</sub>	6.9 kW <sub>peak</sub>

OUTPUT DATA	PRIMO 3.0-1	PRIMO 3.5-1	PRIMO 3.6-1 <sup>1)</sup>	PRIMO 4.0-1	PRIMO 4.6-1 <sup>1)</sup>
AC nominal output ( $P_{ac,r}$ )	3,000 W	3,500 W	3,680 W	4,000 W	4,600 W
Max. output power	3,000 VA	3,500 VA	3,680 VA	4,000 VA	4,600 VA
AC output current ( $I_{ac\ nom}$ )	13.0 A	15.2 A	16.0 A	17.4 A	20.0 A
Grid connection (voltage range)	1 - NPE 220 V / 230 V (180 V - 270 V)				
Frequency (frequency range)	50 Hz / 60 Hz (45 - 65 Hz)				
Total harmonic distortion	< 5 %				
Power factor ( $\cos\ \phi_{ac,r}$ )	0.85 - 1 ind. / cap.				

<sup>1)</sup> Available upon request, conditions apply.

EFFICIENCY	PRIMO 5.0-1	PRIMO 5.0-1 AUS	PRIMO 6.0-1	PRIMO 8.2-1
Max. efficiency	98.0 %	98.0 %	98.0 %	98.1 %
European efficiency ( $\eta_{EU}$ )	97.1 %	97.1 %	97.3 %	97.5 %
$\eta$ at 5 % $P_{ac,r}$ <sup>1)</sup>	80.8 / 82.5 / 82.5 %	80.8 / 82.5 / 82.5 %	84.6 / 86.5 / 86.0 %	85.5 / 89.6 / 88.5 %
$\eta$ at 10 % $P_{ac,r}$ <sup>1)</sup>	89.6 / 94.8 / 93.1 %	89.6 / 94.8 / 93.1 %	90.5 / 95.5 / 94.6 %	92.2 / 96.0 / 94.8 %
$\eta$ at 20 % $P_{ac,r}$ <sup>1)</sup>	93.4 / 97.2 / 96.2 %	93.4 / 97.2 / 96.2 %	94.0 / 97.2 / 96.8 %	94.9 / 97.4 / 97.2 %
$\eta$ at 25 % $P_{ac,r}$ <sup>1)</sup>	94.1 / 97.3 / 96.8 %	94.1 / 97.3 / 96.8 %	94.7 / 97.4 / 97.0 %	95.5 / 97.7 / 97.6 %
$\eta$ at 30 % $P_{ac,r}$ <sup>1)</sup>	94.7 / 97.4 / 97.0 %	94.7 / 97.4 / 97.0 %	95.1 / 97.6 / 97.3 %	95.8 / 97.9 / 97.7 %
$\eta$ at 50 % $P_{ac,r}$ <sup>1)</sup>	95.8 / 97.9 / 97.7 %	95.8 / 97.9 / 97.7 %	96.0 / 97.9 / 97.8 %	96.3 / 98.0 / 98.0 %
$\eta$ at 75 % $P_{ac,r}$ <sup>1)</sup>	96.1 / 98.0 / 97.9 %	96.1 / 98.0 / 97.9 %	96.2 / 98.0 / 98.0 %	96.3 / 98.1 / 97.9 %
$\eta$ at 100 % $P_{ac,r}$ <sup>1)</sup>	96.2 / 97.9 / 97.9 %	96.2 / 97.9 / 97.9 %	96.2 / 98.0 / 97.9 %	96.2 / 97.7 / 97.7 %
MPP adaptation efficiency	> 99.9 %			

PROTECTIVE DEVICES	PRIMO 5.0-1	PRIMO 5.0-1 AUS	PRIMO 6.0-1	PRIMO 8.2-1
DC insulation measurement	Yes			
Overload behaviour	Operating point shift, power limitation			
DC disconnecter	Yes			
Reverse polarity protection	Yes			

INTERFACES	PRIMO 5.0-1	PRIMO 5.0-1 AUS	PRIMO 6.0-1	PRIMO 8.2-1
WLAN / Ethernet LAN	Fronius Solarweb, Modbus TCP SunSpec, Fronius Solar API (JSON)			
6 inputs and 4 digital in/out	Interface to ripple control receiver			
USB (A socket) <sup>2)</sup>	Datalogging, inverter update via USB flash drive			
2x RS422 (RJ45 socket) <sup>2)</sup>	Fronius Solar Net			
Signalling output <sup>2)</sup>	Energy management (potential-free relay output)			
Datalogger and Webserver	Included			
External input <sup>2)</sup>	S0-Meter Interface / Input for overvoltage protection			
RS485	Modbus RTU SunSpec or meter connection			

<sup>1)</sup> And at  $U_{mpp}$  min /  $U_{dc,r}$  /  $U_{mpp}$  max.

<sup>2)</sup> Also available in the light version.

/ Perfect Welding / Solar Energy / Perfect Charging

## WE HAVE THREE DIVISIONS AND ONE PASSION: SHIFTING THE LIMITS OF POSSIBILITY.


/ Whether welding technology, photovoltaics or battery charging technology – our goal is clearly defined: to be the innovation leader. With around 3,300 employees worldwide, we shift the limits of what's possible - our record of over 900 granted patents is testimony to this. While others progress step by step, we innovate in leaps and bounds. Just as we've always done. The responsible use of our resources forms the basis of our corporate policy.

Further information about all Fronius products and our global sales partners and representatives can be found at [www.fronius.com](http://www.fronius.com)


v05 May 2015 EN

Fronius Australia Pty Ltd.  
90-92 Lambeck Drive  
Tullamarine VIC 3043  
Australia  
pv-sales-australia@fronius.com  
www.fronius.com.au

## FRONIUS PRIMO 8.2-1 EFFICIENCY CURVE

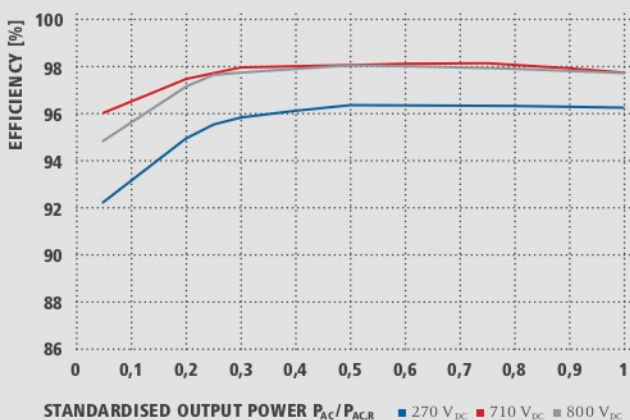

## FRONIUS PRIMO 8.2-1 TEMPERATURE DERATING

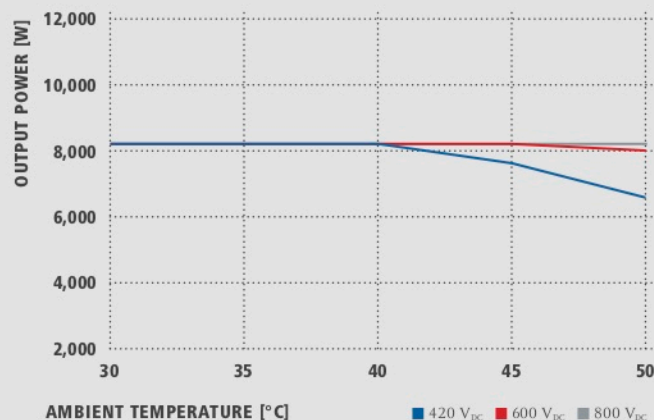

## TECHNICAL DATA FRONIUS PRIMO (5.0-1, 5.0-1 AUS, 6.0-1, 8.2-1)

INPUT DATA	PRIMO 5.0-1 <sup>1)</sup>	PRIMO 5.0-1 AUS	PRIMO 6.0-1	PRIMO 8.2-1
Max. input current ( $I_{dc\ max\ 1} / I_{dc\ max\ 2}$ )	12.0 A / 12.0 A		18.0 A / 18.0 A	
Max. array short circuit current (MPP <sub>1</sub> /MPP <sub>2</sub> )	18.0 A / 18.0 A		27.0 A / 27.0 A	
Min. input voltage ( $U_{dc\ min}$ )			80 V	
Feed-in start voltage ( $U_{dc\ start}$ )			80 V	
Nominal input voltage ( $U_{dc\ n}$ )			710 V	
Max. input voltage ( $U_{dc\ max}$ )			1,000 V	
Usable MPP voltage range ( $U_{mpp\ min} - U_{mpp\ max}$ )			80 V - 800 V	
MPP voltage range at nominal power ( $U_{mpp\ min} - U_{mpp\ max}$ )		240 - 800 V		270 - 800 V
Number of MPP trackers			2	
Number of DC connections			2 + 2	
Max. input voltage ( $P_{dc\ max}$ )	7.5 kW <sub>peak</sub>	7.5 kW <sub>peak</sub>	9.0 kW <sub>peak</sub>	12.3 kW <sub>peak</sub>
OUTPUT DATA	PRIMO 5.0-1 <sup>1)</sup>	PRIMO 5.0-1 AUS	PRIMO 6.0-1	PRIMO 8.2-1
AC nominal output ( $P_{ac,n}$ )	5,000 W	4,600 W	6,000 W	8,200 W
Max. output power	5,000 VA	5,000 VA	6,000 VA	8,200 VA
AC output current ( $I_{ac\ nom}$ )	21.7 A	21.7 A	26.1 A	35.7 A
Grid connection (voltage range)			1 - NPE 220 V / 230 V (180 V - 270 V)	
Frequency (frequency range)			50 Hz / 60 Hz (45 - 65 Hz)	
Total harmonic distortion			< 5 %	
Power factor ( $\cos \phi_{ac,n}$ )			0.85 - 1 ind. / cap.	
GENERAL DATA	PRIMO 5.0-1 <sup>1)</sup>	PRIMO 5.0-1 AUS	PRIMO 6.0-1	PRIMO 8.2-1
Dimensions (height x width x depth)		645 x 431 x 204 mm		
Weight		21.5 kg		
Degree of protection		IP 65		
Protection class		1		
Overvoltage category (DC / AC) <sup>2)</sup>		2 / 3		
Night time consumption		< 1 W		
Inverter design		Transformerless		
Cooling		Regulated air cooling		
Installation		Indoor and outdoor installation		
Ambient temperature range		-40 - +55 °C		
Permitted humidity		0 - 100 %		
Max. altitude		4,000 m		
DC connection technology		4x DC+ and 4x DC- screw terminals 2.5 - 16 mm <sup>2</sup>		
Mains connection technology		3-pole AC screw terminals 2.5 - 16 mm <sup>2</sup>		
Certificates and compliance with standards	DIN V VDE 0126-1-1/A1, IEC 62109-1/-2, IEC 62116, IEC 61727, AS 4777-2, AS 4777-3, G83/2, G59/3, CEI 0-21, VDE AR N 4105			

<sup>1)</sup> Available upon request, conditions apply.

<sup>2)</sup> According to IEC 62109-1.